



DRG No  
BL/D 2777/01-06 INST

THIRD ANGLE  
PROJECTION

REMOVE ALL BURRS  
& SHARP EDGES

USED ON

NOTE  
RING NUT & BOTH THREADS  
ARE ALOCHROMED FOR  
R. F. SCREENING CONTINUITY.

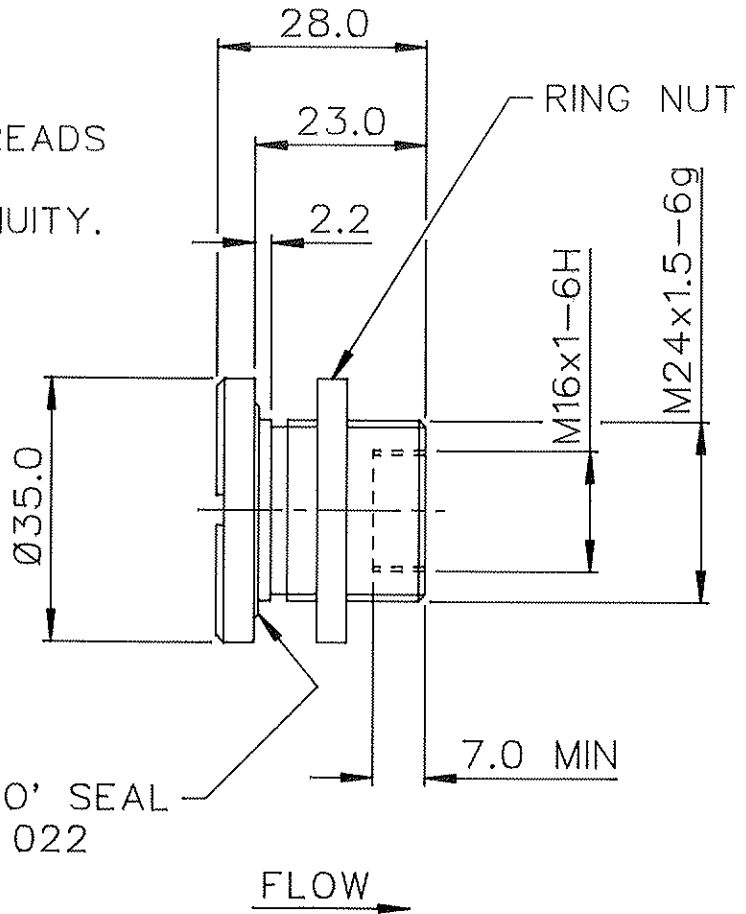

THIS DESIGN IS THE PROPERTY OF BROWNELL LTD  
AND MAY NOT BE COPIED OR REPRODUCED WITHOUT  
THEIR PRIOR WRITTEN PERMISSION

DRG No	OPENING PRESSURE	NATO STOCK No
BL/D2777/01	1.25-1.75 PSI	
BL/D2777/02	0.5-0.75 PSI	
BL/D2777/03	2.5-3.0 PSI	4820-99-736-0163
BL/D2777/04	0.25 PSI	
BL/D2777/05	3.5-4.0 PSI	
BL/D2777/06	1.0-1.5 PSI	

MATERIAL	PROTECTIVE FINISH				
ALUM ALLOY	ANODISED BLACK SEE NOTE	BUILD STANDARD CHANGED	5960	5	26/6/02
EST. WT. —		'O' SEAL DETAIL ADDED	3629	4	22/2/89
DIMNS IN mm	SURFACE ROUGHNESS	REDRAWN	3229	3	4/2/87
SCALE 1 : 1	—	CHANGE	MOD No	ISSUE	DATE
		TOLERANCES	±0.3		

BROWNELL LIMITED LONDON NW10

DRAWN  
LJ

CHKD  
R

SUB CONT.

SUB CONT. DRG REF.

TITLE  
R. F. SCREENED SINGLE WAY  
RELIEF VALVE (INWARD)

DRAWING No  
BL/D 2777/01-06 INST