

DRG. No.



BL/D 5891 INST

USED ON

THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED

DO NOT SCALE - ASK

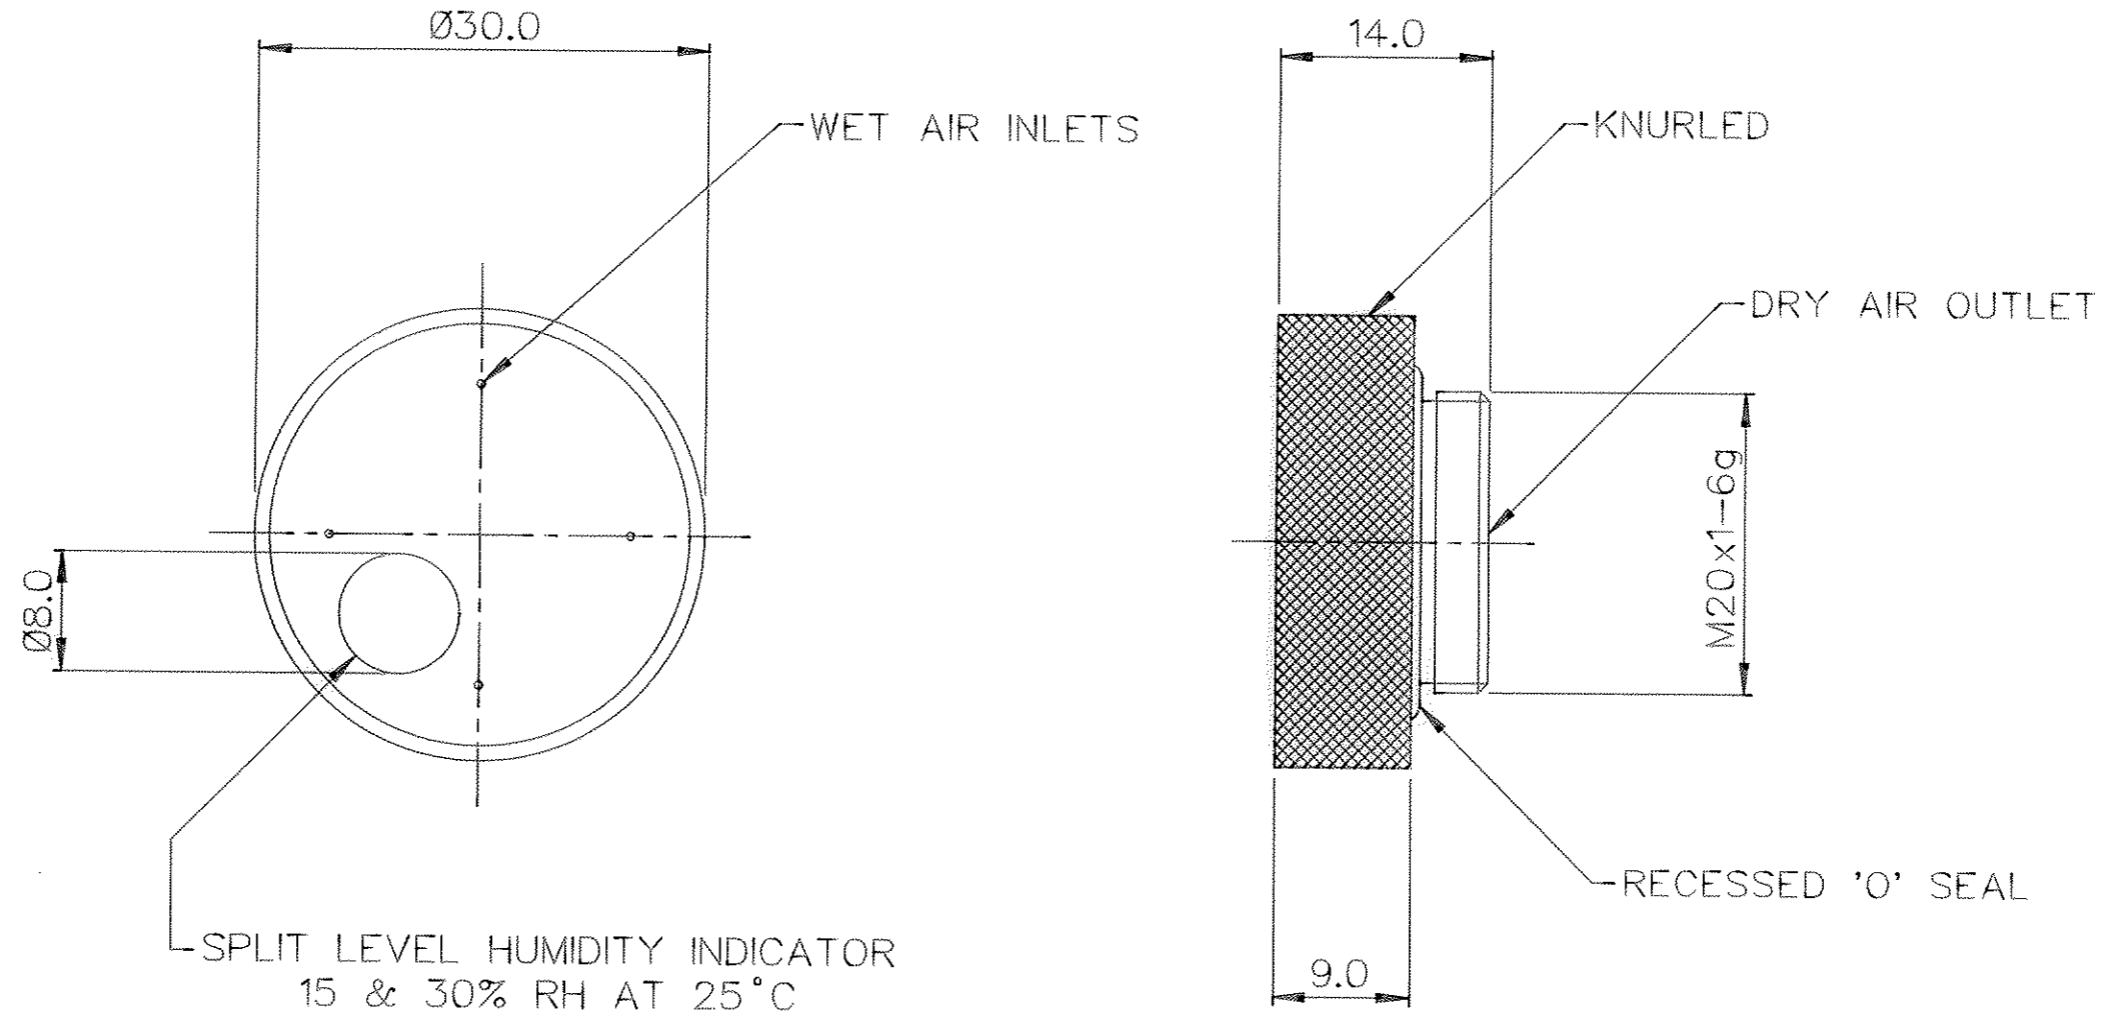

SPLIT LEVEL HUMIDITY INDICATOR
15 & 30% RH AT 25°C

NOTES

1. CONTAINS APPROX 2 GRMS MOLECULAR SIEVES DESICCANT, SPEC. BS7444.
2. BREATHING FLOW RATE: 50cc/min AT 4" Wg.
3. CONFORMS TO DEF STAN 44-2 WHERE APPLICABLE.
4. PACKAGED FOR A SHELF LIFE OF 5 YEARS WHEN STORED IN TEMPERATE CONDITIONS.

FLOW RATE CHANGED	4761	3	29/8/95
REDRAWN	4154	2	14/9/92
CHANGE	MOD. No.	ISSUE	DATE

MATERIAL ALUM ALLOY	PROTECTIVE TREATMENT ANODISED BLACK	TOLERANCES UNLESS STATED ±0.2	BROWNELL LTD. LONDON, N.W.10.		CUSTOMERS REF.	DRAWN LJ	CHECKED [Signature]
EST. WT. —		DIMNS. IN mm/m.m.	TITLE DESICCANT CONTAINER DEHUMIDIFIER (BREATHING)		DRAWING No. BL/D 5891 INST		
		SCALE (ORIGINAL) 2 : 1					

THIS DESIGN IS THE PROPERTY OF BROWNELL LTD. AND MAY NOT BE COPIED OR REPRODUCED WITHOUT THEIR PRIOR WRITTEN PERMISSION.